



## MODELS

KGH-OF-(30, 40, 50, 60, 80, 100)-S

KGH-OF-(30, 40, 50, 60, 80, 100)-R

**GRAB-N-GO  
HIGH PROFILE CASE**

CASE HOLDS 36°F TO 40°F • FORCED AIR REFRIGERATION • OPEN FRONT  
FRONT LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES  
PULL DOWN NIGHT CURTAIN • CASES CAN BE MULTIPLEXED



AUTODESK®  
REVIT®

SELF CONTAINED	Model	Width (inches)	Capacity Cu.ft	Electrical				Required Hard-Wire Connection	Weight lbs		Crate Size (inches)		
				Compressor		Total Amps 115 V	Total Amps 230 V		No Crate	With Crate	L"	W"	H"
				H.P	F.L.A 115V								
	KGH-OF-30-S	29.2	15.9	3/4	16.0	20.7	N/A	1x 115V	408	542	32.2	32.5	85.4
	KGH-OF-40-S	41	23.3	1	16.2	26.3	N/A	1x 115V	463	633	44	32.5	85.4
	KGH-OF-50-S	50.2	29.1	1	16.2	27.0	N/A	1x 115V	514	728	53.2	32.5	85.4
	KGH-OF-60-S	60.6	35.6	1-1/4	N/A	10.8	9.2	1x 115V + 1x 220V	580	818	63.6	32.5	85.4
	KGH-OF-80-S	78.2	46.6	2 x 1	N/A	11.2	16.4	1x 115V + 1x 220V	752	1049	81.2	32.5	85.4
	KGH-OF-100-S	96.6	58.2	2 x 1	2 x 16.2	2 x 27	N/A	1x 115V + 1x 220V	939	1285	99.6	32.5	85.4


REMOTE	Model	Width (inches)	115 Volts Total Amps	B.T.U	Required Hard-Wire Connection	Weight lbs	
						No Crate	With Crate
	KGH-OF-30-R	29.2	0.85	4793	1x 115V	342	476
	KGH-OF-40-R	41	0.90	6940	1x 115V	353	523
	KGH-OF-50-R	50.2	1.30	7565	1x 115V	404	617
	KGH-OF-60-R	60.6	1.36	9383	1x 115V	463	701
	KGH-OF-80-R	78.2	1.81	13881	1x 115V	562	860
	KGH-OF-100-R	96.6	2.60	14921	1x 115V	691	1043

### STANDARD FEATURES

Tempered side glass  
 Pull down night curtain  
 CFC free injected foam insulation  
 Silver colored PVC coated steel front panel  
 PVC coated steel gray interior  
 Black steel kick plate  
 Foamed polystyrene black end panels  
 Height adjustable shelves can be tilted  
 Products stop on all shelves  
 Temperature and defrost regulated by a digital controller  
 Removable condensate evaporating pan for easy cleaning on self contained units  
 Slide out condensing unit on self-contained units  
 Digital thermometer  
 Leveling feet

### OPTIONAL FEATURES

Stainless steel interior and / or exterior  
 Other colors available  
 Solid or full view end panels  
 Additional shelves  
 Joining Kit and/or Partition and or / product dividers  
 Price tag molding  
 Condensate evaporating pan for remote cases  
 Casters add 4-3/8" to height  
 Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

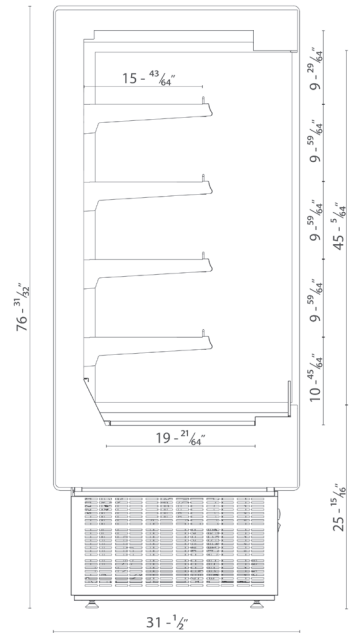

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Castors

### NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U's are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 or 8.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

### WARRANTY

One year parts and labor with an additional four years on the compressor (part only)



3560 NW 56th St  
 Fort Lauderdale, FL USA 33309  
 Tel: 786.600.4687 / Toll Free: 844.218.8477 / Fax: 786.661.4100



5659 Royalmount Ave.  
 Montreal, QC, Canada H4P 2P9  
 Tel: 514.737.9701 / Toll Free: 888.275.4538 / Fax: 514.342.3854  
 Toll free: 877.453.8832  
[sales@mvpgroupcorp.com](mailto:sales@mvpgroupcorp.com) / [mvpgroupcorp.com](http://mvpgroupcorp.com)



Hydra - Kool is a registered trademark of MVP Group Corp.  
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE