

Plug Door Quote Request

Date: _____
Contact: _____
Address: _____


Phone: _____
Email: _____

Ship to Zip Code: _____

TYPE OF WALKING AND DOOR OPENING DIMENSIONS

<input type="checkbox"/> Indoor Walk-in	<input type="checkbox"/> Outdoor Walk-in	
<input type="checkbox"/> Cooler	<input type="checkbox"/> With Floor	<input type="checkbox"/> No Floor
<input type="checkbox"/> Freezer	<input type="checkbox"/> With Floor	<input type="checkbox"/> No Floor
<input type="checkbox"/> Right Hinged	Dimensions: _____ X _____	
<input type="checkbox"/> Left Hinged		

* Standard 26 Gauge Stucco-embossed Acrylume *

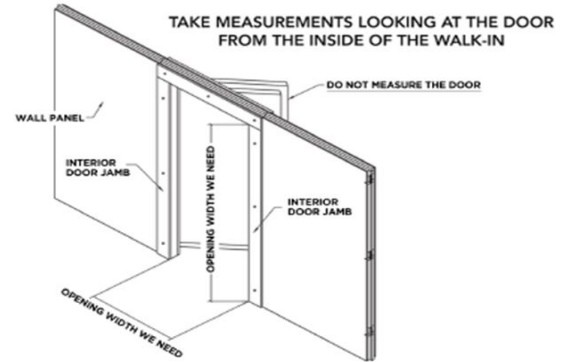

Alternative door finishes include:

Interior 26 Gauge White Stucco Embossed Galvanize Steel
 Exterior 26 Gauge White Stucco Embossed Galvanize Steel
 Interior 26 Gauge Black Stucco Embossed Galvanize Steel
 Exterior 26 Gauge Black Stucco Embossed Galvanize Steel

Interior 24 Gauge Stainless Steel
 Exterior 24 Gauge Stainless Steel

Accessories:

Third Hinge
 Interior Kick Plate (Aluminum Diamond Tread)
 Exterior Kick Plate (Aluminum Diamond Tread)
 Pilot Light Switch (Shipped loose)
 Vapor-Proof Light (Shipped loose)
 2" Dial Thermometer (Shipped loose)

Non-Heated Viewing Window 12" x 12" (Coolers)
 Non-Heated Viewing Window 12" x 24" (Coolers)
 Heated Glass & Frame Viewing Window 12" x 12" (Freezers)
 Heated Glass & Frame Viewing Window 12" x 24" (Freezers)

Standard Specifications

- 1 1/2" Thick heavy-duty wooden frame
- 26-gauge stucco-embossed Acrylume on interior and exterior door and frame surfaces
- 4" thick AK-XPS4 extruded polystyrene insulation providing R-value of R-29 for coolers and R-32 for freezers
- AK-XPS4 insulation contains no formaldehyde, HCFCs or CFCs
- Interior door frame to ensure secure door installation for long lasting performance
- Doors are equipped with cam-rise hinge, spring-loaded hinge, latch and inside glow-in-the-dark PUSH handle
- 4" PVC channel for covering existing 4" wall thickness; when a wall is thicker than 4", a matching metal covering will be provided

- Thermoplastic (PVC) coated magnetic gasket, essential to ensure a positive frost free seal
- Digital LED thermometer with on and off pilot light switch
- Inside door sweep
- Freezer doors are equipped with perimeter heater wire that is connected to electric gang box mounted on exterior frame
- Magnetic stainless steel 'L' channel for door gasket contact
- 3-sided frame provided for a walk-in without floor
- 4-sided frame provided for a walk-in with floor
- Provide 8 to 12 3/8" pass-through mounting bolts with fastener (depending on door height)
- **Freezer Door Electric Specification: Available in 115Volt or 220-Volt**