SOMERSET

Tel: 978.667.3355 800.772.4404 Fax: 978.671.9466 Email: somerset@smrset.com

www.smrset.com

SOMERSET

CDR-2100 DOUGH ROLLER

IDEAL FOR <u>PIZZA</u> AS WELL AS:

- Pita Bread
- Pie Crusts
- Roti
- Flour Tortillas
- Cookies
- Sheeting
- Sweet Doughs
- Calzones
- Cinnamon Rolls
- Pierogi
- Rolled In Dough

HIGHLIGHTS

- Sheets 500-600pcs. per hour up to 20" (51cm)
- Ships standard with synthetic, non-stick rollers
- Ergonomic design makes it easy and simple to operate
- Sheets dough to a uniform thickness in seconds
- All stainless steel construction offers safety, sanitation, speed, simplicity, durability, and low cost

Efficient, side operate compact dough roller. Sheets dough up to 20" (51cm) in diameter in seconds

SOMERSET INDUSTRIES, INC • 137 PHOENIX AVE • LOWELL, MA 01852 • U.S.A.

SOMERSET.

DOUGH ROLLER

CDR-2100 SYNTHETIC ROLLERS

CDR-2100M METALLIC ROLLERS

FEATURES

- The most advanced SIDE OPERATED compact sheeter
- Spring loaded scrapers readily removable for easy cleaning
- Compact design, ideal for use in limited space
- Safety sensors for automatic shutoff
- Ergonomic design for easy operation
- Convenient side operation
- Large hopper accepts large pieces of dough
- Maintenance free drive mechanism
- Drive mechanism isolated from roller area
- Safe, simple, easy to operate, easy to clean
- Sanitary, heavy duty, all stainless steel welded construction
- Simple handle adjustments for exact uniform dough thickness
- Thickness stops available

INDUSTRY USES:

Pizzerias

Restaurants


- Institutions
 Schools
- Mexican establishments
- Other ethnic food production
- Cafes
 Bakeries

Removable

Indian Establishments

SPECIFICATIONS PATENT PENDING

(Specifications subject to change without notice)

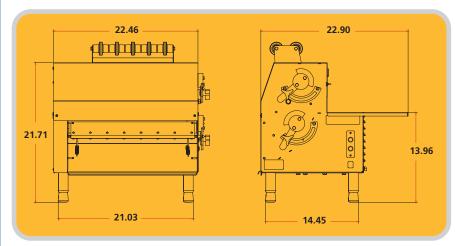



MADE IN THE U.S.A. 01.01.22

Solverser

Rollers: 3.5" dia. by 20" length (8.89 cm dia. by 50.80 cm length)

Bearings: Sealed Ball Bearings,

Gear Motor: Heavy Duty 3/4 HP,

Maintenance Free, Single Phase,

Legs: 4" Adjustable, Stainless Steel

Shipping Weight: 210 lbs (95kgr)

Permanently Lubricated

115V/60Hz or 220V/50Hz

Finishing: All Stainless Steel

Scrapers: Synthetic, Spring Loaded,



CDR-2100